


# SMT-600WCY Central System

SMT-600WCY .....Call for a Quote  
 Call for a quote on a complete Central System



- 300-5176: 2.2 gpm / 8.3 lpm @ 1000 psi / 69 bars, 208V
- 300-5175: 2.9 gpm / 11 lpm @ 800 psi / 55 bars, 208V
- 300-5164: 2.2 gpm / 8.3 lpm @ 1100 psi / 76 bars, 230V
- 300-5160: 2.9 gpm / 11 lpm @ 850 psi / 59 bars, 230V

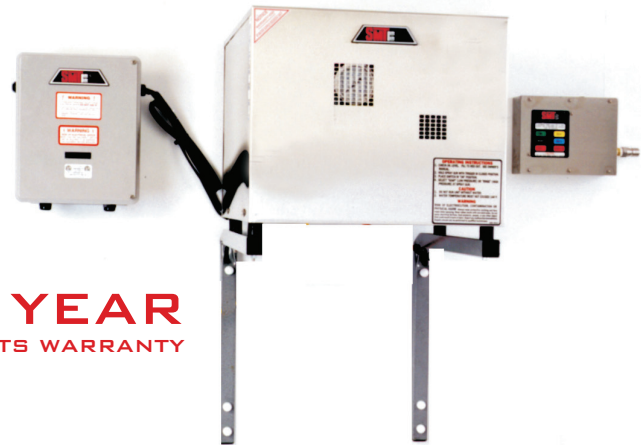

**2 YEAR**  
 PARTS WARRANTY

The SMT-600WCY is the main pumping unit for a SMT Central System. This system is excellent for internal cleaning applications where a wall-mounted Central System unit is needed.

The SMT-600WCY features remote station controlled, master control panel with 24V low voltage control cable, a 30 minute run timer, water supply sensor switch, water temperature limit switch, automatic line-pressure release, stainless steel service valve, 6' water inlet supply hose, powder coated stainless steel wall mount brackets, an two chemicals injected by solenoids at the pump. Remote stations can be located up to 500 feet from the pump.

ETL-CSA listed to UL 1776



## RELATED PRODUCTS

Remote / Heavy Duty Hose Reel / Accessories: Wall & Tile Brush & Hammer Jet JR.

### TECHNICAL SPECIFICATIONS

- 1100 psi / 2.2 gpm
- 850 psi / 2.9 gpm
- 208 / 230V / 60Hz / 1 phase /9A  
 - requires 20A dedicated circuit
- Totally Enclosed & Fan Cooled  
 2HP Baldor Motor
- 3 Cylinder CAT® Plunger Pump
- Dual Chemical Injection
- Thermal Limit Switch, 120°F / 49°C

### FEATURES

- Liquid Filled Pressure Gauge
- Master Control Panel, 24V
- Water Level Float Switch
- Powder Coated Wall Mounts
- Manifold with SS Bleeder Valve
- Automatic Line Pressure Relief
- Manifold Hose
- 6' Supply Hose
- Maintenance Kit Included